

Dual SCR Power Modules are designed for use in power electronic circuits and equipment under normal operating conditions.

### KEY PARAMETERS

$U_{DRM}, U_{RRM}$	up to 1600 V
$I_{T(AV)}$	150 A
$I_{TSM}$	4200 A
$du/dt^*$	1000 V/ $\mu$ s
$di/dt$	100 A/ $\mu$ s

\* maximum (non standard) value



### Outline

See package details for further information

### APPLICATION

- High Voltage Power Supplies
- Motor Control

### FEATURES

- electrically isolated base
- high current capabilities
- high surge current capabilities
- high rates voltages
- low thermal impedance (Aluminium Nitride Insulators)
- tested according to IEC standards
- compact size and small weight

Designed for use in high power industrial and commercial power electronic circuits and equipment where high currents are encountered and high reliability is essential.

### ORDERING INFORMATION

When ordering please refer to device code builder presented below. Please use the complete part number when ordering, quote or in any future correspondence relating to your order.

<b>MT</b> <input type="text"/> <b>-150-</b> <input type="text"/> <input type="text"/> <b>-</b> <input type="text"/> <b>0</b>	du/dt (see table)
_____	Voltage class (hundred volts)
_____	Elements configuration (see drawings)

# MT\_-150 Dual SCR Power Module



KKMTx150, August 2009 version

---

## ELECTRICAL PARAMETERS

### Voltage ratings

Voltage class	$U_{RRM}$	$U_{RSM}$	$I_{RRM}$
	V	V	mA
04	400	500	20
06	600	700	
08	800	900	
10	1000	1100	
12	1200	1300	
14	1400	1500	
16	1600	1700	

### du/dt group codes

Group code	du/dt
	V/ $\mu$ s
0	no specified value
5	320
6	500
7	1000

---

Zakłady Elektronowe LAMINA S.A.  
Puławska 34  
PL-05-500 Piaseczno  
POLAND

Tel.: +48-22-7572731  
Tel.: +48-22-3989409  
Fax: +48-22-7500884  
e-mail: sekretariat@lamina.com.pl  
www.lamina.com.pl

# MT\_-150 Dual SCR Power Module

KKMTx150, August 2009 version

## Electrical properties

Parameter	Unit	Test conditions	Value
Average on-state current	$I_{T(AV)}$	A	150
Case temperature	$T_c$	°C	85
RMS on-state current	$I_{T(RMS)}$	A	235
Surge current	$I_{TSM}$	A	$T_j=125^\circ\text{C}$ , $U_R=0,8U_{RRM}$ , $t_p=10\text{ms}$
$I^2t$ – value	$I^2t$	$\text{kA}^2\text{s}$	88
On-state voltage max.	$U_{TM}$	V	$T_j=25^\circ\text{C}$ , $I_{TM}=625\text{A}$
Threshold voltage	$U_{T(T0)}$	V	0,915
Slope resistance	$r_T$	$\text{m}\Omega$	1,4
Latching current	$I_l$	mA	$T_j=25^\circ\text{C}$ , $U_D=12\text{V}$
Holding current	$I_H$	mA	$T_j=25^\circ\text{C}$ , $U_D=12\text{V}$
Circuit commutated turn-off time (typical)	$t_q$	$\mu\text{s}$	$T_j=125^\circ\text{C}$ , $I_{TM}=150\text{A}$ , $di_R/dt=12,5\text{A}/\mu\text{s}$ , $du/dt=20\text{V}/\mu\text{s}$ , $U_D=0,67U_{DRM}$ , $U_{RM}=100\text{V}$
Turn-On time (typical)	$t_{gt}$	$\mu\text{s}$	$I_{TM}=100\text{A}$ , $U_{DM}=100\text{V}$
Rate of rise of on-state current-repetitive	$di/dt$	$\text{A}/\mu\text{s}$	$T_j=125^\circ\text{C}$ , $I_{TM}=3I_{T(AV)}$ , $U_D=0,67U_{DRM}$ , $f=50\text{Hz}$ , $I_{GM}=1\text{A}$ , $di_G/dt=1\text{A}/\mu\text{s}$
Critical rate of raise of off-state voltage	$du/dt$	$\text{V}/\mu\text{s}$	$T_j=125^\circ\text{C}$ , $U_D=0,67U_{DRM}$
Gate current to trigger	$I_{GT}$	mA	$T_j=25^\circ\text{C}$ , $U_D=12\text{V}$
Gate voltage to trigger	$U_{GT}$	V	$T_j=25^\circ\text{C}$ , $U_D=12\text{V}$
RMS isolation voltage	$U_{isol}$	V	1s, circuit to base, all terminals shorted

## Thermal properties

Parameter	Unit	Test conditions	Value
Thermal resistance, junction to case per thyristor/module	$R_{thJC}$	°C/W	DC
Thermal resistance, case to heatsink per thyristor/module	$R_{thCh}$	°C/W	
Operating junction temperature	$T_{jmin} \dots T_{jmax}$	°C	
Storage temperature	$T_{stg}$	°C	

# MT\_-150 Dual SCR Power Module

KKMTx150, August 2009 version


## Mechanical properties

Parameter		Unit	Value
Mounting torque (M6)	M1	Nm	6,00 ±15%
Terminal connection torque (M6)	M2	Nm	6,00 ±15%
Weight	M	g	360

## Cofigurations


### MTA

Terminal number:




### MTC

Terminal number:




### MTE

Terminal number:



### MTK


Terminal number:



# MT\_-150 Dual SCR Power Module

KKMTx150, August 2009 version

## Package details

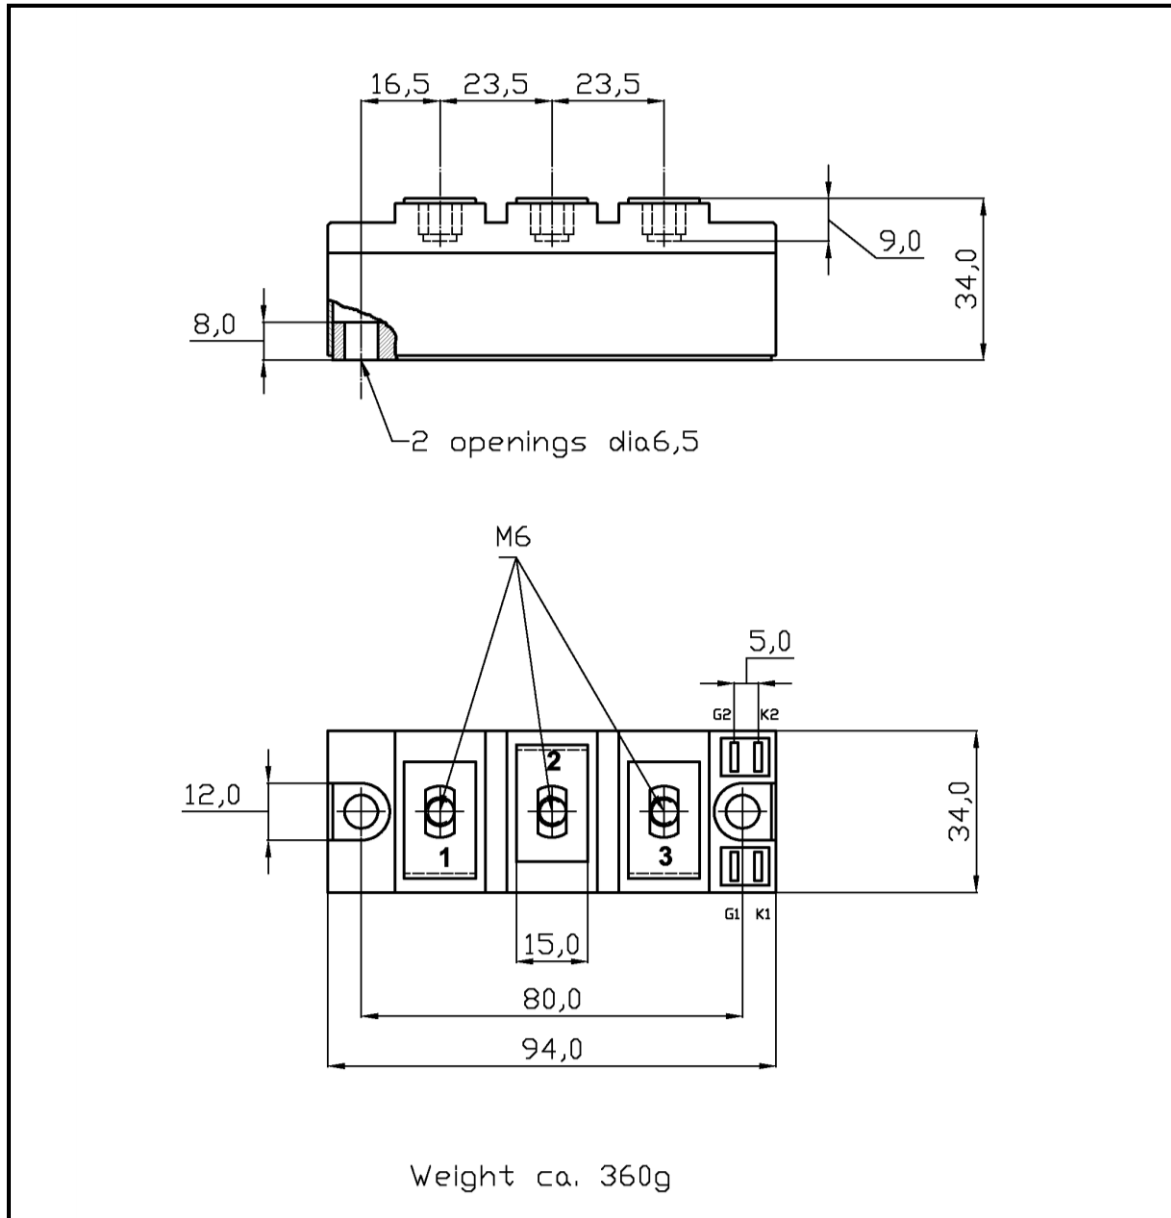


For further package information, please contact Sales & Marketing Department. All dimensions in mm, unless stated otherwise.  
Do not scale.


# MT\_-150 Dual SCR Power Module

KKMTx150, August 2009 version


## CHARACTERISTICS

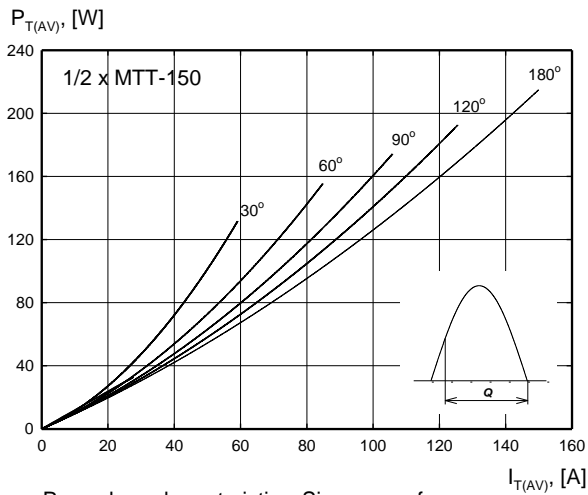


Power loss characteristics. Sinus wave form.

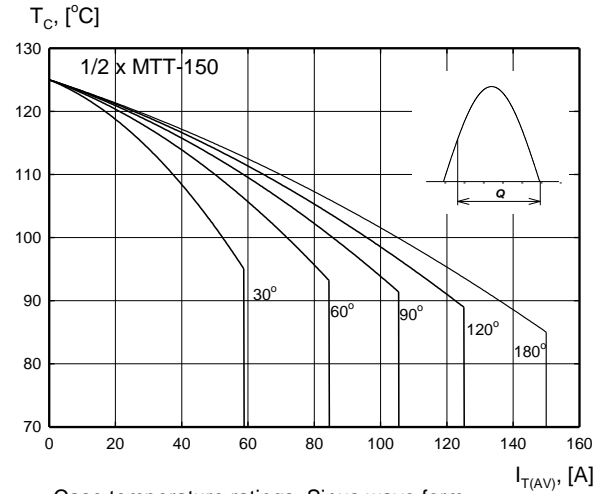

Case temperature ratings. Sinus wave form.

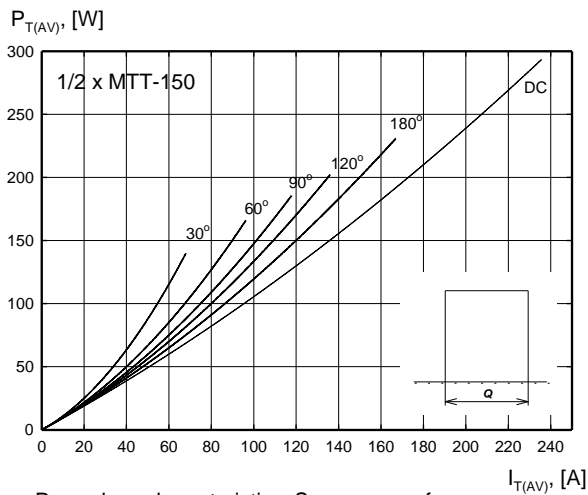

Power loss characteristics. Square wave form.




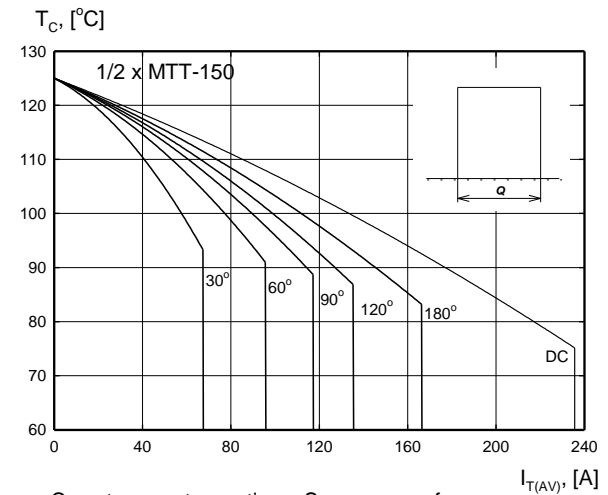


Case temperature ratings. Square wave form.

# MT\_-150 Dual SCR Power Module



KKMTx150, August 2009 version

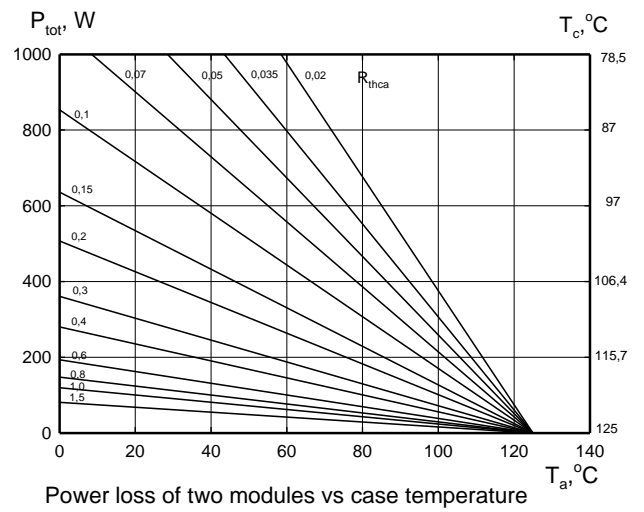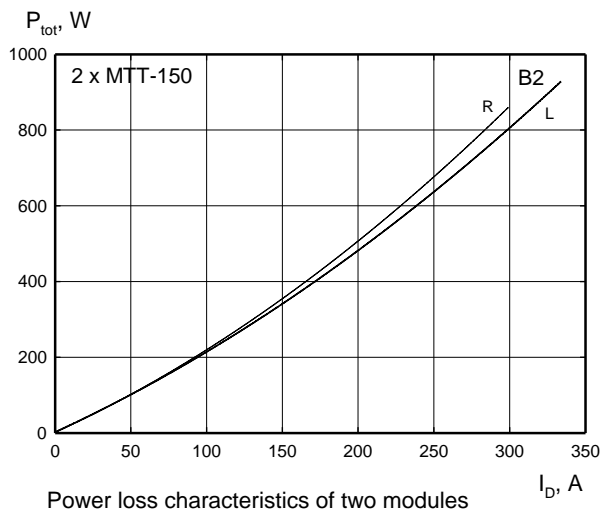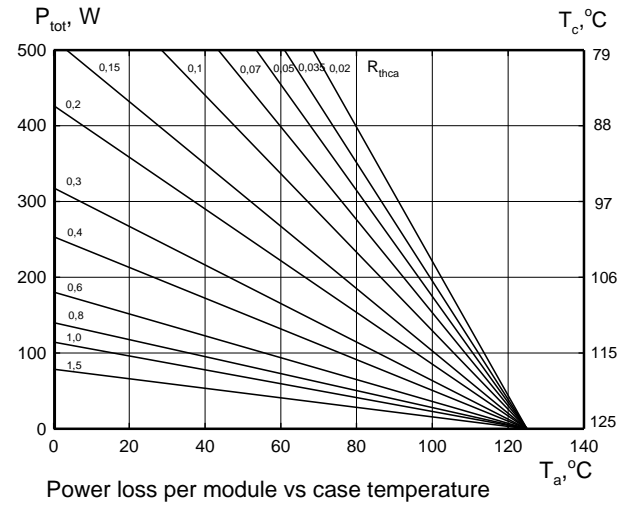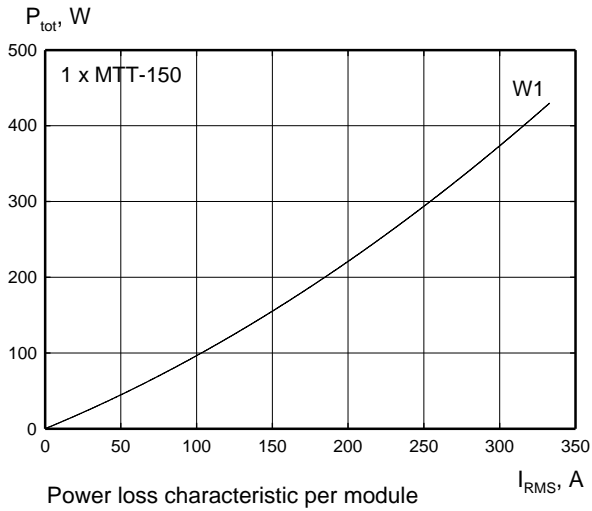





Zakłady Elektronowe LAMINA S.A.  
Puławska 34  
PL-05-500 Piaseczno  
POLAND

Tel.: +48-22-7572731  
Tel.: +48-22-3989409  
Fax: +48-22-7500884  
e-mail: sekretariat@lamina.com.pl  
www.lamina.com.pl

# MT\_-150 Dual SCR Power Module



KKMTx150, August 2009 version

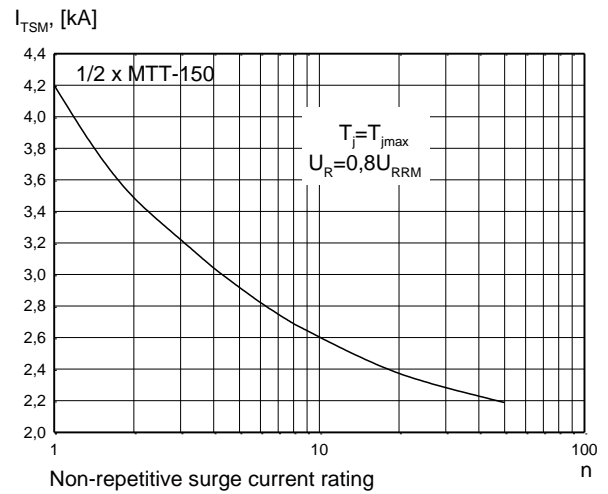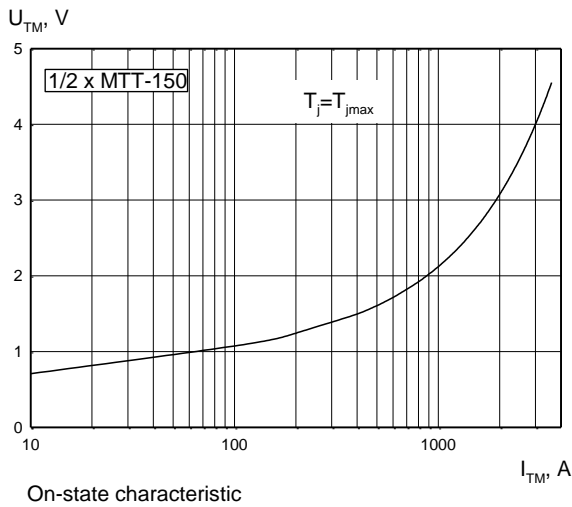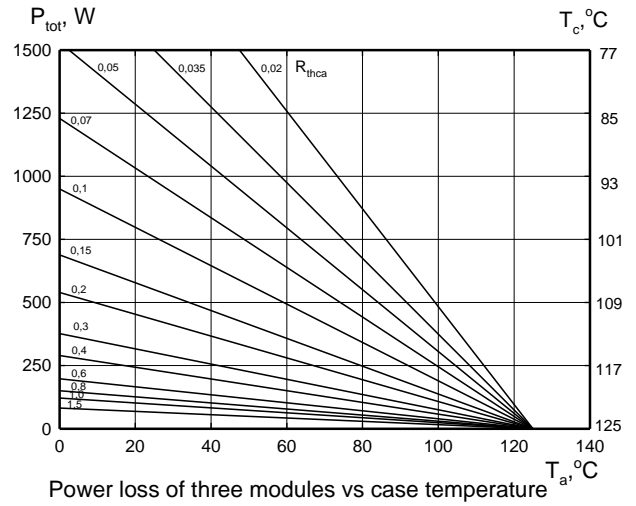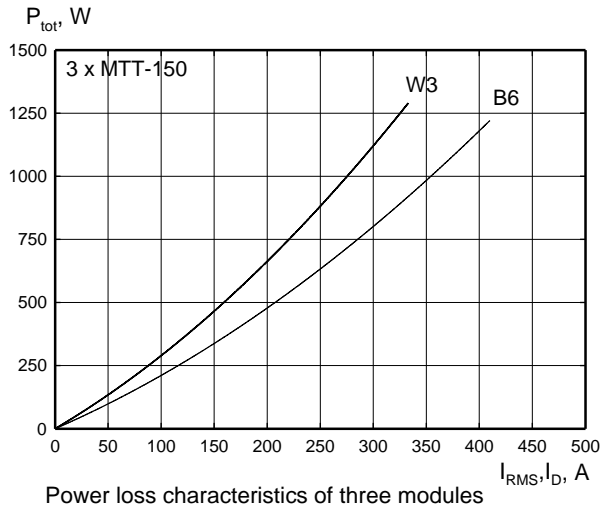


Zakłady Elektronowe LAMINA S.A.  
Puławska 34  
PL-05-500 Piaseczno  
POLAND

Tel.: +48-22-7572731  
Tel.: +48-22-3989409  
Fax: +48-22-7500884  
e-mail: sekretariat@lamina.com.pl  
www.lamina.com.pl




# MT\_-150 Dual SCR Power Module

KKMTx150, August 2009 version

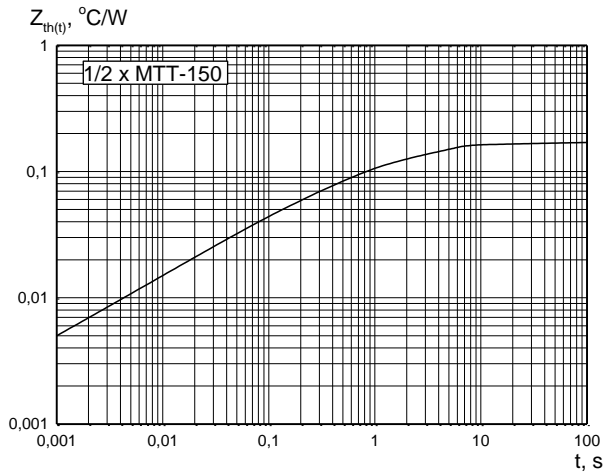


Transient thermal impedance

## Gate characteristics

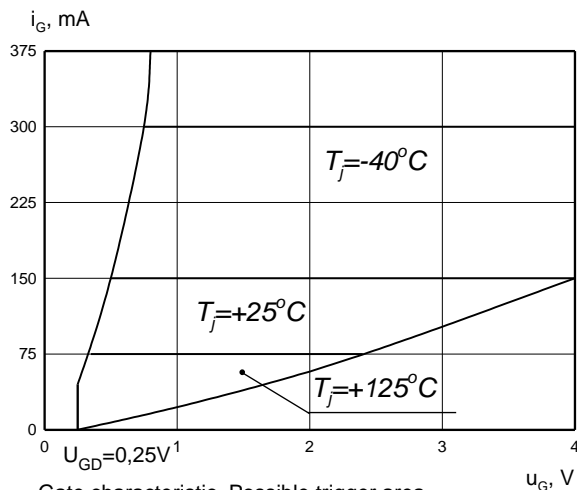

Gate characteristic. Possible trigger area.

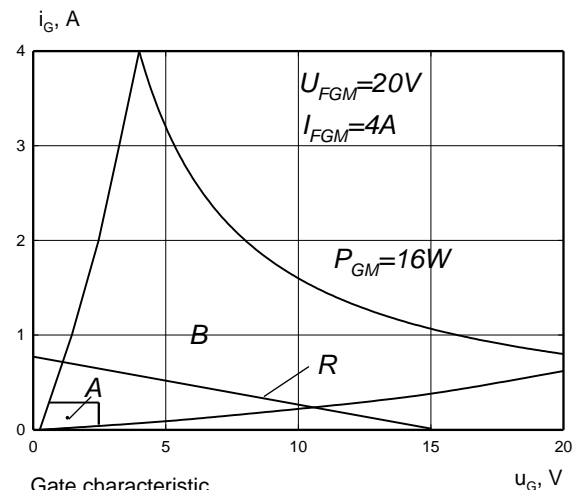

Gate characteristic.

- A - possible trigger area
- B - permitted gate pulse forcing area
- R - recommended gate drive load line

# MT\_-150 Dual SCR Power Module



KKMTx150, August 2009 version

---

## HEATSINKS

ZE LAMINA S.A. has its own proprietary range of extruded aluminium heatsinks designed to optimise the performance of our semiconductors with natural and forced air flow.

## POWER ASSEMBLY CAPABILITY

ZE LAMINA S.A. provides a support for those customers requiring more than a basic semiconductor and offers precisely assembled Power Blocks according to factory or customer standards.

---

**Zakłady Elektronowe LAMINA S.A.**  
Puławska 34  
PL-05-500 Piaseczno  
POLAND

Tel.: +48-22-7572731  
Tel.: +48-22-3989409  
Fax: +48-22-7500884  
e-mail: sekretariat@lamina.com.pl  
www.lamina.com.pl